




Graphic Symbol



ORDERING CODE


PU	220	02	A	AC220V	T
↑	↑	↑	↑	↑	↑
Model	Motion pattern	Joint pipe bore	Initial estate	Standard voltage	Wiring form
PU: Two position two way solenoid valve	220: Direct drive type	01: 1/8'' 02: 1/4'' 03: 3/8'' 04: 1/2'' 06: 3/4'' 08: 1''	A: Large Flux AR: Small Aperture Direct Drive	DC12V DC24V AC110V 50/60Hz AC220V 50/60Hz	Blank: Standard coil T: Timer + Coil


Remark:
Pls feel free to contact with us if have any customized request.

SPECIFICATION

Model	PU220-01AR	PU220-02AR	PU220-03AR	PU220-03A	PU220-04A	PU220-06A	PU220-08A
Working Medium	Air, Water, Oil						
Motion Pattern	Direct Drive Type						
Type	Normal Close Type						
Aperture of Flow Rate(mm)	2.3	2.3	10	13	13	20	25
Cv Value	0.18	0.18	1	4	4	8.5	11
Joint Pipe Bore	1/8''	1/4''	3/8''	3/8''	1/2''	3/4''	1''
Operation Fluid Viscosity	50 CST						
Working Pressure	0~7 kgf/cm²						
Max. Pressure Resistance	10.5 kgf/cm²						
Operating Temperature Range	-5~80°C						
Weight(kg)	0.217	0.203	0.587	0.744	0.712	0.912	1.45

OVERALLDIMENSION&STRUCTURE

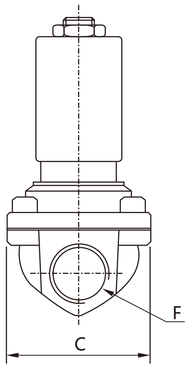

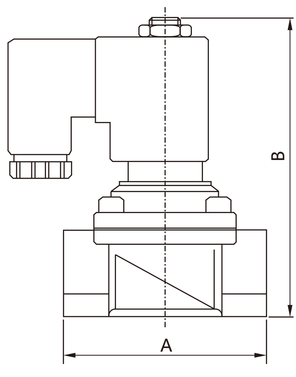

Model	F(G)	A	B	C
PU220-01AR	1/8''	30	61	22
PU220-02AR	1/4''	30	61	22
PU220-03AR	3/8''	55	78.5	30
PU220-03A	3/8''	66	100	48
PU220-04A	1/2''	66	100	48
PU220-06A	3/4''	75	108	58
PU220-08A	1''	97	121	70